
## Changing covers on Kinman Hx pickups.

1-Sep-04

1 of 2 pages.

- 1) It is important to remove the cover correctly so as to avoid damaging the pickup.
- 2) Insert two mounting screws into the screw holes from the back of the pickup so they only protrude into the cover ears slightly.
- 3) Grab the screws between thumb and forefinger to secure the pickup.
- 4) Grab the cover between thumb and forefinger and gently and carefully wriggle the cover away from the pickup.
- 5) IMPORTANT: Keep the cover parallel to the pickup as in photo 1, do not let it \*Skew\* as in photo 2. Skewing is the major cause of damage to pickups.

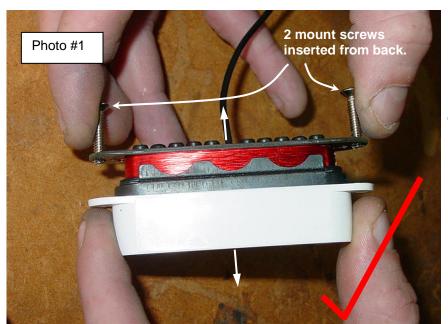

Pull the cover off the pickups like this.



Not like this as it will break the coil lead wire.

Be careful not to disturb the factory set 'shield interference setting', as shown in photos 3 and 4.

